


## RS1 SHACKEL PADLOCKS SERIES 900

## PROGRAMMING

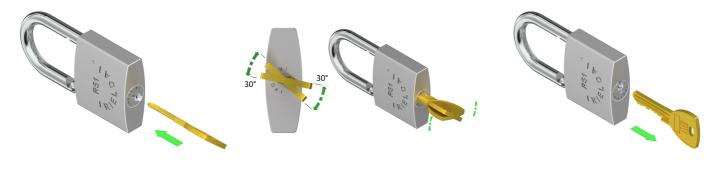

- Insert the gold Programming key
- Turn the gold key back and forth a few times without compenting the rotation (about 30°)
- Rotate the key to the vertical position
- Remove the key
- The lock is now Programmed
- Put away the gold Programming key in a safe place
- Use the silver key

RS1 SHACKEL PADLOCKS SERIES 900

## **RE-PROGRAMMING**



- Insert the gold Programming key
- Rotate the key from the vertical position at beat



- Remove the key
- The lock is now ready to be programmed with a new key